

1064nm 1x3/3x3

1x3/3x3


PMFBT Coupler
400-2050nm



/

		1x3	3x3
	-		
	nm	1064	
	nm	± 20	
	%	1x3 33/33/33(only 3x3)	
(max)	dB	1.0	1.2
	dB	17	16
	%	± 7(1x3) / ± 10(3x3)	
	W	0.5 2 5	
	-	FC/APC	
	-	PMØ80	
	m	1	
	mm	3.0x54 or 4.0x60()	
		-40 +85	
		-50 +85	

	Through Port	Coupling Port
40/20/40	± 5.0	± 6.0
35/30/35	± 4.0	± 5.0
33/33/33	± 6.0	± 6.0
30/40/30	± 4.0	± 3.0
25/50/25	± 3.5	± 2.4
20/60/20	± 3.3	± 2.0
15/70/15	± 3.0	± 1.8
10/80/10	± 2.8	± 1.6
5/90/5	± 2.5	± 1.5

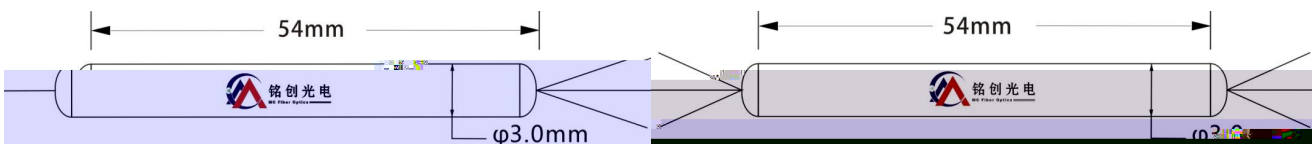

MCPM FBT	13- 1x3	1064- 1064nm	424- 40/20/40	L- 0. 5W	P9- PMØ80	08- 0. 8m	B- 250um	N- None
	33- 3x3		333- 33/33/33	1- 1W		10- 1. 0m	L- 900um	FP- FC/PC
			343- 30/40/30	5- 5W		15- 1. 5m	S-	FA- FC/APC
			252- 25/50/25	S-		S-		S-
			262- 20/60/20					
			171- 15/70/15					
			181- 10/80/10					
			595- 5/90/5					

MCPM#FBT- 13- 1064- 333- L- P9- 10- L- FA

, 1x3 , 1064nm 33: 33: 33, 500 , 4. 0x60mm
 PMØ80, 1 , 900um , FC/APC