

2000nm 1x3/3x3

1x3/3x3


PMFBT Coupler
400-2050nm



/

		1x3	3x3
	-		
	nm	2000	
	nm	± 20	
	%	1x3 33/33/33(only 3x3)	
(max)	dB	0.8	1.0
	dB	18	17
	%	± 5(1x3)/± 10(3x3)	
	W	0.5 2 5	
	-	FC/APC	
	-	PM550/PM950	
	m	1	
	mm	3.0x54 or 4.0x60()	
		-40 +85	
		-50 +85	

	Through Port	Coupling Port
40/20/40	± 5.0	± 6.0
35/30/35	± 4.0	± 5.0
33/33/33	± 6.0	± 6.0
30/40/30	± 4.0	± 3.0
25/50/25	± 3.5	± 2.4
20/60/20	± 3.3	± 2.0
15/70/15	± 3.0	± 1.8
10/80/10	± 2.8	± 1.6
5/90/5	± 2.5	± 1.5

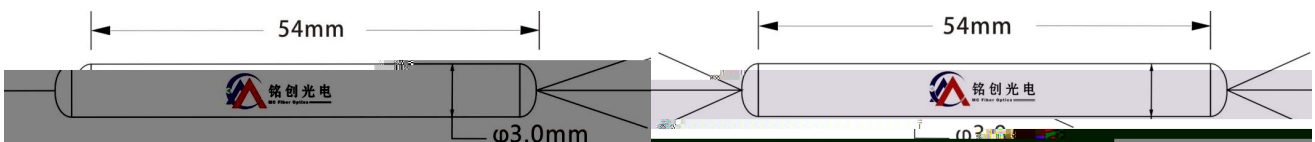

MCPM FBT	13- 1x3	2000- 2000nm	424- 40/20/40	L- 0.5W	P15- PM550	08- 0.8m	B- 250um	N- None	
	33- 3x3		333- 33/33/33	1- 1W	P19- PM950	10- 1.0m	L- 900um	FP- FC/PC	
			343- 30/40/30	5- 5W			15- 1.5m	S-	FA- FC/APC
			252- 25/50/25	S-			S-		S-
			262- 20/60/20						
			171- 15/70/15						
			181- 10/80/10						
			595- 5/90/5						

MCPM#BT- 13- 2000- 333- L- P19- 10- L- FA

, 1x3 , 2000nm, 33: 33: 33, 500 , 4. 0x60mm
 PM950, 1 , 900um , FC/APC