

# 2000nm 1x2/2x2

PM Fiber Filter Coupler

0.1-55% 780-2050nm



/

		1x2 (2x2)
	nm	2000
	nm	± 40
	-	01/99 50/50
(max)	dB	1.2@1x2, 1.5@2x2
(min)	dB	22@1x2, 20@2x2
	dB	50
	-	PM550/PM950
	W	0.5 20
	-	
	-	FC/APC
	m	1
	mm	5.5x35
		-5 +70
		-40 +85



25

0.3dB,

5dB

2dB,

Key

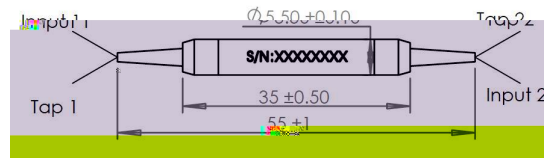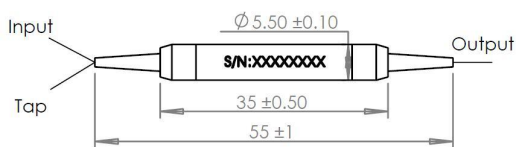

Order No.	Wavelength	Split Ratio	Power	Material	Core Diameter	Length	Coating	Connector
12-1x2	2000-2000nm	50-50/50	L-0.5W	B-	P15-PM550	08-0.8m	B-250um	N-None
22-2x2		10-10/90	1-1W		P19-PM950	10-1.0m		FP-FC/PC
		01-1/99	5-5W			15-1.5m	L-900um	FA-FC/APC
		S-	10-10W			S-	S-	S-

MCPMFC-12-2000-50-L-B-P19-10-L-FA

PM950, 1, 900um, FC/APC, key