

# 1950nm 1x2/2x2

PMcrystal s Coupl er

0.1-55%

780-2050nm



/

		1x2 (2x2)
	nm	1950
	nm	± 40
	-	01/99 50/50
(max)	dB	1.2@1x2, 1.5@2x2
(min)	dB	22@1x2, 20@2x2
	dB	50
	-	PM550/PM950
	W	0.5 20
	-	
	-	FC/APC
	m	1
	mm	5.5x35
		-5 +70
		-40 +85


25

0.3dB,

5dB

2dB,

Key

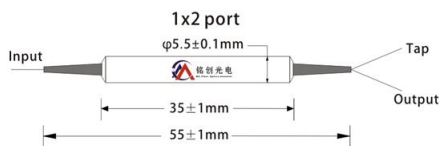

MCP	MTC	Wavelength	Split Ratio	Power	Loss	Material	Length	Core Size	Coating
12-1x2	1950-1950nm	50-50/50	L- 0.5W	S-	P15- PM550	08-0.8m	B- 250um	N- None	
22-2x2		10-10/90	1-1W	F-	P19- PM950	10-1.0m	L- 900um	FP- FC/PC	
		01-1/99	5-5W			15-1.5m		FA- FC/APC	
		S-	10-10W			S-	S-	S-	

MCPMTC-12-1950-50-L-F-P19-10-L-FA

1950nm 50:50 500 1 900um FC/APC key