

1xN(2xN)

(1900~2100nm)

FBT Coupler

400-2050nm

1xN

2xN




/

		1x4/2x4		1x6/2x6		1x8/2x8	
	nm	1900, 1950, 1970, 2000, 2050					
	nm	± 15					
	-	P	A	P	A	P	A
(max)	dB	7.2	7.6	9.3	9.9	10.7	11.3
	dB	0.25		0.35		0.35	
	dB	50					
	dB	55					
	W	0.5 2 5					
	-	SMF-28e, SM950					
	-	FC/APC					
	m	1					
	mm	100x80x10(ABS)					
		-20 +75					
		-40 +85					

25

5dB

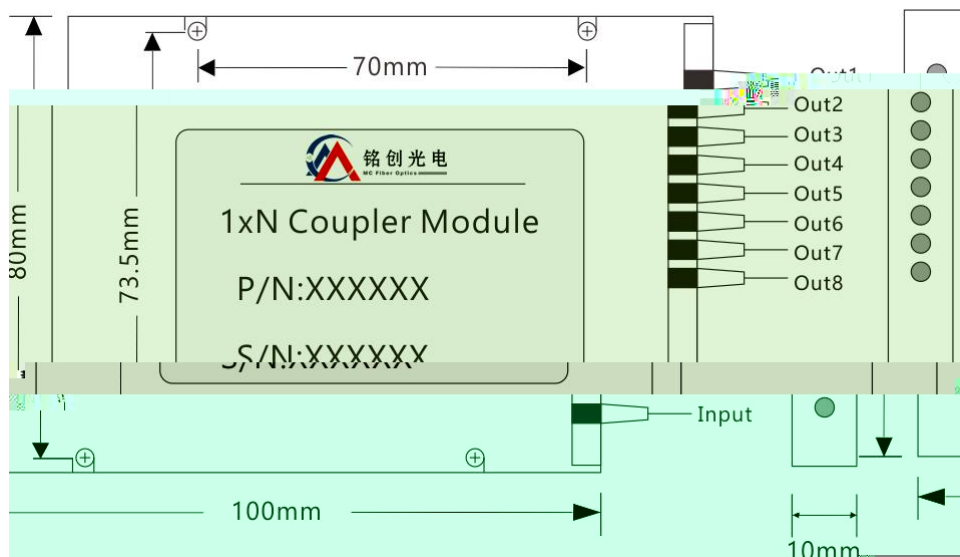

P-P	14- 1x4	1900- 1900nm	EV-	L- 0.5W	S2- SMF- 28e	08- 0.8m	B- 250um	N- None	
A-A	24- 2x4	1950- 1950nm	S-	1- 1W	S19- SM950	10- 1.0m	L- 900um	FP- FC/PC	
	16- 1x6	1970- 1970nm		5- 5W		15- 1.5m	S-	FA- FC/APC	
	26- 2x6	2000- 2000nm		S-		S-		S-	
	18- 1x8	2050- 2050nm							
	28- 2x8								

MCFBT- P- 14- 1950- EV- L- S19- 10- L- FA

P 1x4

1950nm

500

SM950

1 900um

FC/APC