

2050nm

(SOP) 90°




| | | |
|--------|----|---------|
| | nm | 2050 |
| | nm | ± 30 |
| (Type) | dB | 0.6 |
| (max) | dB | 0.9 |
| | ° | 45 |
| | ° | ± 2 |
| | dB | 0.1 |
| | mW | 300 |
| | - | SM1950 |
| | m | 1 |
| | - | FC/APC |
| | N | 5 |
| | mm | xL35 |
| | | -5 + 70 |
| | | -40 +85 |

25

0.3dB,

5dB,

2dB.

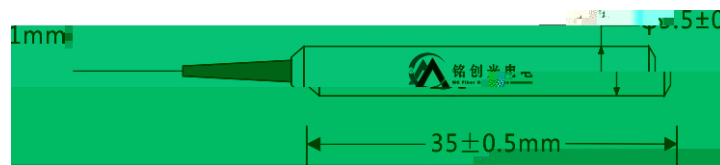

| MCFRM | | | | | | |
|-------|-------------|---------|------------|---------|---------|-----------|
| | 2050-2050nm | L-<0.5W | S2-SMF-28e | 08-0.8m | B-250um | N-None |
| | S- | S- | S19-SMI950 | 10-1.0m | L-900um | FP-FC/PC |
| | | | S- | 15-1.5m | S- | FA-FC/APC |
| | | | | S- | | S- |

MCFRM-2050-L-S19-10-L-FA

2050nm

300mW

SM1950

1

900um

FC/APC