

1480nm 1x3/3x3

1x3/3x3


PMFBT Coupler
400-2050nm



/

| | | 1x3 | 3x3 |
|-------|----|------------------------|-----|
| | - | | |
| | nm | 1480 | |
| | nm | ± 20 | |
| | % | 1x3 33/33/33(only 3x3) | |
| (max) | dB | 0.8 | 1.0 |
| | dB | 18 | 17 |
| | % | ± 5(1x3) / ± 10(3x3) | |
| | W | 0.5 2 5 | |
| | - | FC/APC | |
| | - | PM550 | |
| | m | 1 | |
| | mm | 3.0x54 or 4.0x60() | |
| | | -40 +85 | |
| | | -50 +85 | |

| | Through Port | Coupling Port |
|----------|--------------|---------------|
| 40/20/40 | ± 5.0 | ± 6.0 |
| 35/30/35 | ± 4.0 | ± 5.0 |
| 33/33/33 | ± 6.0 | ± 6.0 |
| 30/40/30 | ± 4.0 | ± 3.0 |
| 25/50/25 | ± 3.5 | ± 2.4 |
| 20/60/20 | ± 3.3 | ± 2.0 |
| 15/70/15 | ± 3.0 | ± 1.8 |
| 10/80/10 | ± 2.8 | ± 1.6 |
| 5/90/5 | ± 2.5 | ± 1.5 |

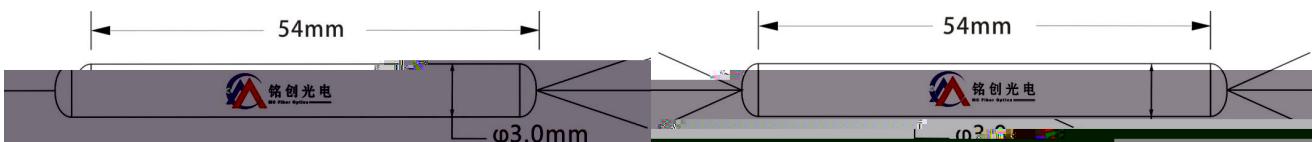

| | | | | | | | | |
|-------------|--------|-------------|--------------|--------|---------|---------|---------|-----------|
| MCPM FBT | 13-1x3 | 1480-1480nm | 424-40/20/40 | L-0.5W | P15-PM5 | 08-0.8m | B-250um | N-None |
| | 33-3x3 | | 333-33/33/33 | 1-1W | 50 | 10-1.0m | L-900um | FP-FC/PC |
| | | | 343-30/40/30 | 5-5W | | 15-1.5m | S- | FA-FC/APC |
| | | | 252-25/50/25 | S- | | S- | | S- |
| | | | 262-20/60/20 | | | | | |
| | | | 171-15/70/15 | | | | | |
| | | | 181-10/80/10 | | | | | |
| | | | 595-5/90/5 | | | | | |
| | | | | | | | | |
| | | | | | | | | |

MCPM#FBT-13-1480-333-L-P15-10-L-FA

, 1x3 , 1480nm 33: 33: 33, 500 , 4.0x60mm
PM550, 1 , 900um , FC/APC